




WORKING DIAGRAM

INFO

STANDARD ACCESSORIES

MAXIMUM AREA

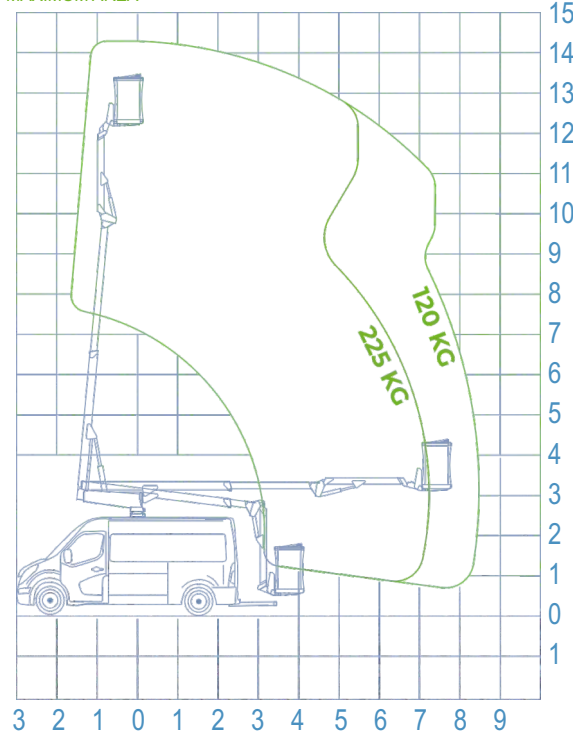

- OUTRIGGERS**
A

- WORKING HEIGHT**
14,40 m

- BASKET HEIGHT**
12,40 m

- MAX OUTREACH**
8,50 m

- BASKET LOAD CAPACITY**
225 kg

- BASKET SIZE**
1400x700x1100 mm

- BASKET ROTATION**
0°

- CONTROLS**
Electric

- TURRET ROTATION**
400°



- GVW**
3,5 ton

DATA SHEET

- Cables and hoses installed inside the boom
- Articulated jib
- Proportional electro-hydraulic controls with speed regulation of all movements
- Stabilization controls from the basket and from the ground
- Possibility of simultaneous movements
- Engine start/stop from the basket
- 230V and 12V socket in the basket
- CAN BUS electronic management system
- Cataphoresis treatment

SAFETY DATA

- Unintentional maneuver protection bar
- Circuit breaker with differential protection on the 230V line
- Automatic levelling of the basket
- Inclinometer
- Flanged block valves
- Emergency button
- Emergency manual hand pump
- Electrical hour counter
- 12V emergency electric pump
- Digital hour-counter
- Automatic PTO disengagement

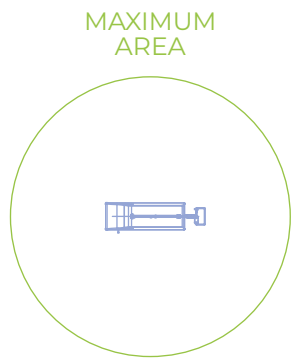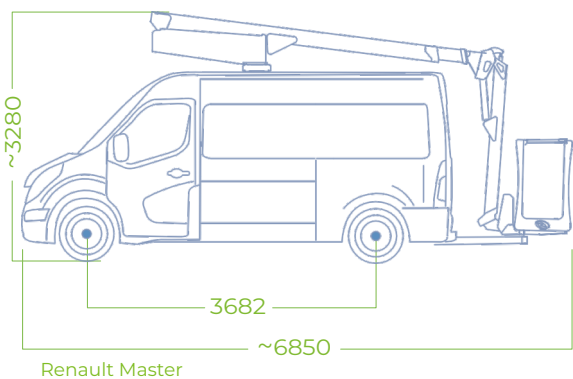

*Sforzo e altezza di lavoro possono variare di +/- 5% a seconda di variazioni nella fabbricazione o condizioni di lavoro.